


STARBOARD™ NL

FP6750M
52" Ceiling Fan**

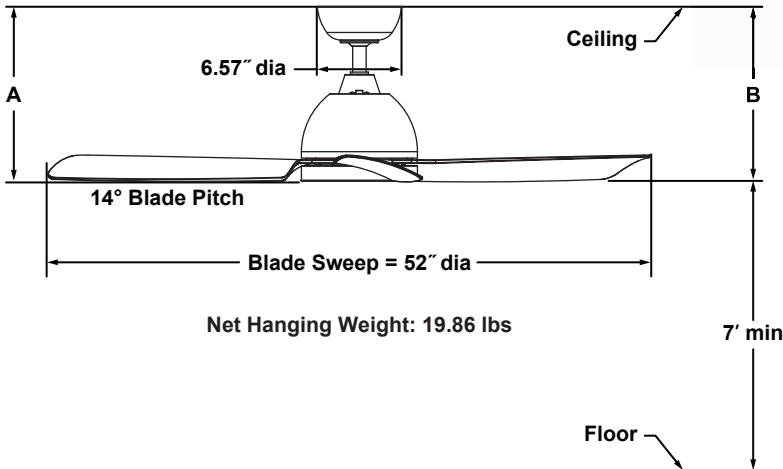

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 13.61" | 13.67" |
| Fan w/12" downrod | 21.11" | 21.17" |
| Fan w/18" downrod | 27.11" | 27.17" |
| Fan w/24" downrod | 33.11" | 33.17" |
| Fan w/36" downrod | 45.11" | 45.17" |
| Fan w/48" downrod | 57.11" | 57.17" |
| Fan w/60" downrod | 69.11" | 69.17" |
| Fan w/72" downrod | 81.11" | 81.17" |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 24" composite blades is included.

CONTROL OPTIONS:

CW1WH-6750 3-speed wall control is included. Slide button wall control has 3 fan speeds and off button. The reverse switch is located on the motor assembly. Optional WC1WH, WR500WH, CWRL4 and WR505WH wall controls — sold separately. Optional CR500, CRL4WH and CR530 hand-held remote controls and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DR1SS-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations. This fan is for room up to 400 sq ft.

| Available Finish | |
|------------------|--|
| BLM | Black with Black Blade |
| BNM | Brushed Nickel with Brushed Nickel Blade |
| DZM | Dark Bronze with Dark Bronze Blade |
| MWM | Matte White with Matte White Blade |

| Airflow / Energy Efficiency Info (120V) | | | | | |
|---|---------|------|-------------|------|-------|
| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
| High | 179 | 6718 | 77 | 0.74 | 88 |
| Med | 105 | 3988 | 113 | 0.47 | 35 |
| Low | 59 | 1926 | 165 | 0.27 | 12 |

| Energy Guide FTC | | | |
|---------------------------|--|-----------------------------------|--------------------------------|
| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
| 52 | 4473 | 15 | 86 |

| Fan Velocity (FPM) | |
|---------------------|------------------|
| High Speed Velocity | Average Velocity |
| 611 | 393 |